Technical Details Of Canden Light bank—CP2000 Led lights

Color	Black Cable-Daylight White 5000K
Material	Plastic end caps, PC diffusers, Aluminum
Control Method	JVR TIMER—ON/OFF
Light Source Type	LED
Finish Type	Natural Anodised
Shade Material	Polycarbonate
Voltage	12 VDC/24VDC
Shape	Linear
Wattage PER LIGHT	31 watts
Brightness	2000 Lumen
Mounting Type	Surface mounting

Shade Color	White
Area Lighting Classification	IP20
Finish types	Natural Anodised
Plug Format	Standard US plug
Batteries Included?	No
Batteries Required?	No
Wattage	31 Watts
Incandescent equivalent	200 Watts
Color Temperature	5000 Kelvin
Color Rendering Index (CRI)	80.00
Bulb Length	12 Inches
Lumen Maintenance Factor at the End of Life	0.7

Model shown is installed in GC20 model.

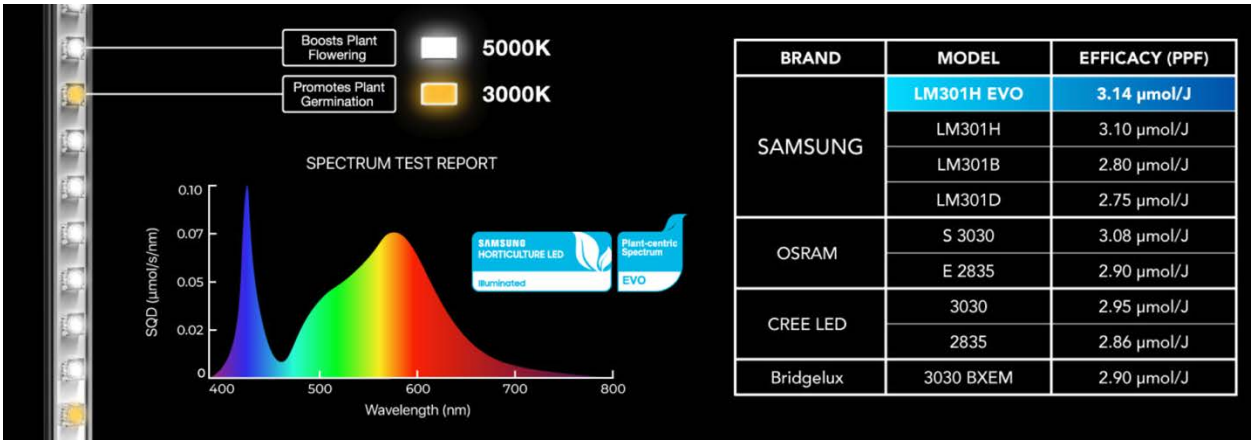

BRAND	MODEL	EFFICACY (PPF)
SAMSUNG	LM301H EVO	3.14 µmol/J
	LM301H	3.10 µmol/J
	LM301B	2.80 µmol/J
	LM301D	2.75 µmol/J
OSRAM	S 3030	3.08 µmol/J
	E 2835	2.90 µmol/J
CREE LED	3030	2.95 µmol/J
	2835	2.86 µmol/J
Bridgelux	3030 BXEM	2.90 µmol/J