Temperature range*	18°C to 32°C
%RH (optional)*	50% to 90% RH as limited by dew points
Temperature uniformity	± 1°C
% RH control (optional)	± 3%
Temperature control at sensor	± 0.2°C
Controller model	Standard FUJI PXF4
Control resolution	± 0.1°C
Cooling/Heating type	Thermoelectric/Peltier driven-for heating/Cooling
Chamber Volume in Cu. Ft	10 cu.ft
External Dimension-LXWXH	23″×26″×76″ (refer to drawing)
Internal Dimension-LXWXH	19″ x 20″ x 48″ (refer to drawing)- height includes plenum which is 5″H.
Shelf dimension	18” x 19” approx
Cabinet specs	White painted steel exterior/ Highly durable plastic interior-easy to clean and maintain
Lights /Growth height	Vertically mounted LED lights in back wall--2x 36" led LIGHTS
Electrical requirement	115V/60hz/1ph/5A, Unit plugs into standard wall outlet.
Shelf quantity, type	4 per chamber/ additional shelves available, wire shelf- PVC coated with 4 installation clips. Shelf capacity- 100 lbs distributed load.
Weight specs	Chamber weight- 194 lbs Shipping weight- 249 lbs

*Specifications are based on 20°C ambient and standard voltage. Specifications are subject to change without notice.

Chamber options:

- Chart recorder
- Additional shelving
- Outlets
- Extended temperature ranges
- RO/DI water filtration system
- Water carboy
- Dehumidifier

Chamber features:
This chamber is used by scientists in many research areas, from genomics to clinical epidemiology and species conservation. This chamber not only can be used in drosophila research but also in many types of insect growing projects as well. Chamber has 2” thick CFC free insulation providing good thermal gradient. Door locks are standard in doors. Chamber also includes pre-installed casters capable of supporting 150-200lbs per caster.
Chamber uses thermoelectric assembly for heating and cooling. This type of cooling/heating system completely eliminates need for conventional refrigeration system and failures due to mechanical components such as compressors thereby drastically increasing the life expectancy of each chamber. Maintenance cost is also lowered by the thermoelectric/Peltier driven heating/cooling system. The chamber is quiet in operationChamber temperature set points are tightly controlled using programmable Fuji or watlow model PID controller.
Chamber standard features also include industry standard programmable JVR light timer or equivalent. Chamber has 2-3' led lights Natural 5500k,1080 lumens each,3.4 watts per ft. Customer specified led lights can be added at no cost.
Humidity system: Humidity control is optional. Humidity range is achieved via additive ultrasonic humidification, a controller with with factory calibrated %RH sensor. Humidifier is installed typically in the rear of the chamber and can be easily serviced or replaced. RO/DI system is recommended but not required as long as the water quality specification is met. Tap water should be fine. The humidifier comes with a 15’ ¼” poly tube, shut off valve and quick disconnect fittings as well as a fitting to connect to water faucet.
Water quality specification:
Water conductivity greater then 0.1 µS,TDS of < 10 ppm and works in operating pressure range from 10psi to 80 psi"

Drosophila growth chamber

Model No: DRS10

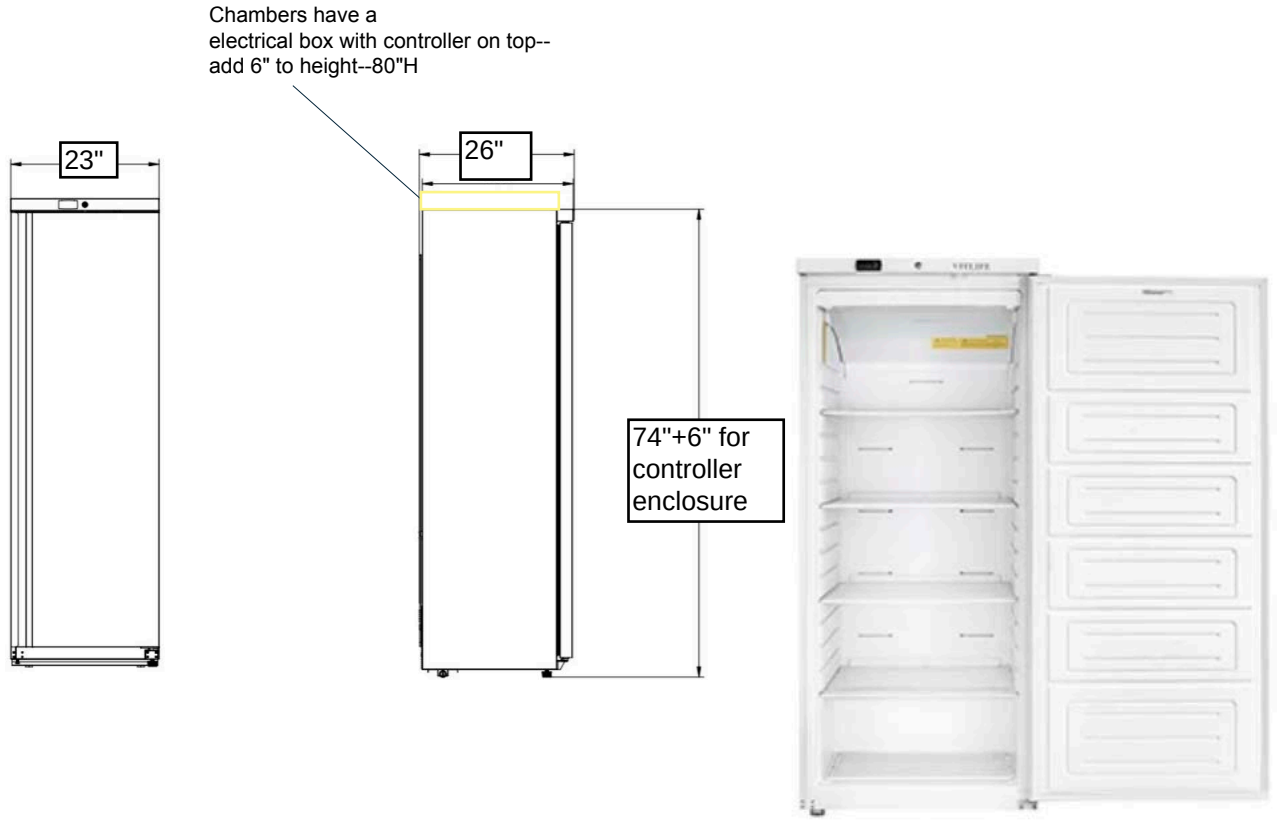

Canden Products
St. Louis, Mo

Email: sales@candenproducts.com